


#### IS-PDS-GI255M

#### **Embedded UHF PD Sensor for GIS, Monopole Type**




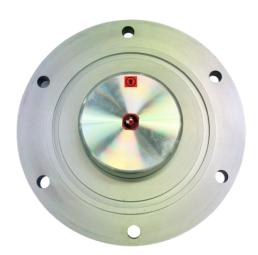


Insulation defects occur due to electrical/mechanical stress and other environmental factors, with the occurrence patterns of partial discharge varying depending on the type of defect. In the case of Gas Insulated Switchgear (GIS), defects such as conductor and outer casing protrusions, and spacer cracks may occur during manufacturing, transportation, installation, and operation. IS-PDS-GI255M measures partial discharge signals in the UHF (Ultra High Frequency) band caused by internal GIS defects, enabling early detection of GIS faults and supporting reliable equipment operation.

Technical Specification				
Operation Frequency Range	100MHz ~ 1,500MHz			
Sensor Sensitivity	IEC60270 Apparent Discharge / Below 5pC PD Detection (Above -40dBm / 0.1uW, 50Ω Standard)			
Impedance	50Ω			
Connector	IEC61169-16 / N-type (Female)			
Average Effective Height	100MHz ~ 1,800MHz / 12mm (500MHz ~ 1,500MHz / 15mm)			
Operating Temperature	-55 ~ +85°C			
Degree of Protection	IEC60529 / IP-56			
Applicable Pressure	-760mmHg. G ~ 7kgf/cm². G			
Dimensions	O.D 255Φ x I.D 115Φ x H 63/39mm, M12 x 6			

# **Average Effective Height**

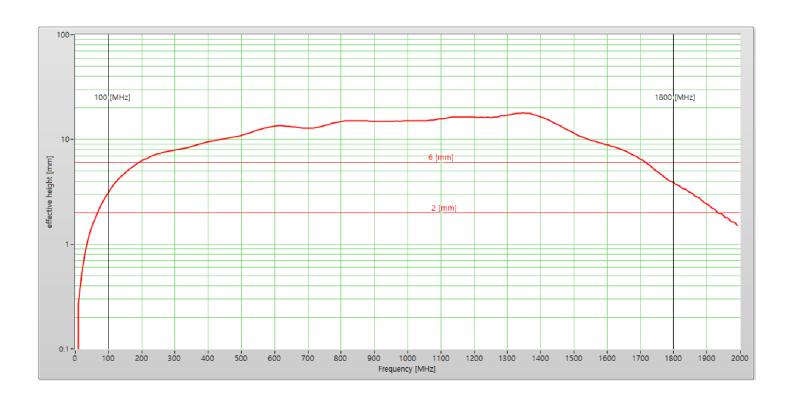

### Layout

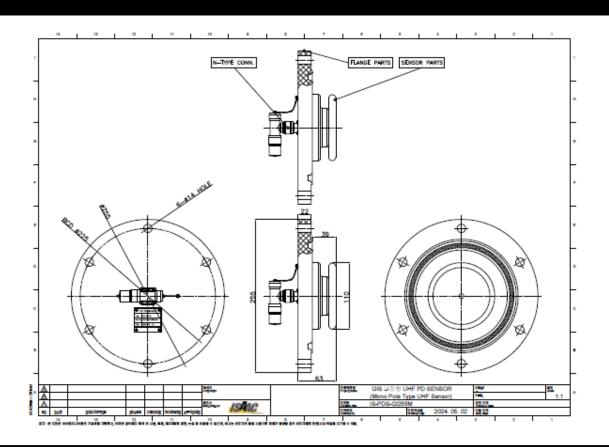

**Product & Model Name** 

Mono Pole Type UHF Sensor, IS-PDS-GI255M

**Test List** 

Cold / Dry heat / Damp heat, cyclic / Vibration



### TEST REPORT



Dt&C Co., Ltd.

 Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si Gyeonggi-do, Korea
 Tel: 031-321-2664, Fax: 031-321-0220





1. Report No: DRCKREL2410-0466

2. Customer

Name: ISAAC PDS

Address: #2705, 120 Heungdeokjungang-ro (Yeongdeok-dong, UTOWER),

Giheung-gu, Yongin-si, Gyeonggi-do

Use of Report : For quality control

Product Name / Model Name : Mono Pole Type UHF Sensor / IS-PDS-GI255M

Test Method Used: IEC 60068-2-1: 2007, IEC 60068-2-2: 2007, IEC 60068-2-6: 2007,

IEC 60068-2-30: 2005

Date of Test: October 01, 2024 ~ October 11, 2024

Location of Test : Permanent Testing Lab
 On Site Testing

(Address: 28, Baengnyeong-ro, 20Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea)

8. Testing Environment: Temperature (22 ± 5) °C, Humidity (46 ± 9) % R.H.

9. Test Result : Refer to the attached Document

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

This laboratory is not accredited for the test results marked. " \* "

Tested by Technical Manager

Affirmation Name : NamGyu Lee

Name : KiDeok Kim

The above test report is the accredited test result by Korea Laboratory Accreditation Scheme, which signed the ILAC-MRA.

October 22, 2024

Dt&C Co., Ltd.

Accredited by KOLAS, Republic of KOREA

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

This test report is prohibited to copy or reissue in whole or in part without the approval of Dt&C Co., Ltd. TRF-RC-006(02)240307

















Pages: 1/34

**Product & Model Name** 

Mono Pole Type UHF Sensor, IS-PDS-GI255M

**Test List** 

Insulation resistance measurement & High voltage Test



## TEST REPORT



Dt&C Co., Ltd.

Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
 Tel: 031-321-2664, Fax: 031-321-1664

Report No : DRCREL2410-0750

Customer

Name: ISAAC PDS

Address: #2705, 120 Heungdeokjungang-ro (Yeongdeok-dong, UTOWER),

Giheung-gu, Yongin-si, Gyeonggi-do

3. Use of Report : For quality control

4. Product Name / Model Name : Mono Pole Type UHF Sensor / IS-PDS-GI255M

Test Method Used : Request of customer

Date of Test: October 08, 2024

8. Testing Environment: Temperature (21 ± 4) °C, Humidity (46 ± 9) % R.H.

9. Test Result : Refer to the attached Document

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test report is not related to KOLAS accreditation.

Affirmation	Tested by	1.6	Technical Manager
	Name : NamGyu Lee		Name : KiDeok Kim



October 22, 2024

Dt&C Co., Ltd.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

This test report is prohibited to copy or reissue in whole or in part without the approval of Dt&C Co., Ltd.
TRF-RC-008(01)240307 Pages: 1 / 9















**Product & Model Name** 

Mono Pole Type UHF Sensor, IS-PDS-GI255M

**Test List** 

IP5X(Dust-protected) & IPX6(Protected against powerful water jets)



### TEST REPORT



Dt&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si Gyeonggi-do, Korea Tel: 031-321-2664, Fax: 031-321-0220





1. Report No: DRCKREL2410-0472

2. Customer

Name: ISAAC PDS

Address: #2705, 120 Heungdeokjungang-ro (Yeongdeok-dong, UTOWER),

Giheung-gu, Yongin-si, Gyeonggi-do

3. Use of Report : For quality control

Product Name / Model Name : Mono Pole Type UHF Sensor / IS-PDS-GI255M

Test Method Used : IEC 60529 : 2013

Date of Test: October 14, 2024 ~ October 15, 2024

Location of Test : 

Permanent Testing Lab On Site Testing

(Address: 28, Baengnyeong-ro, 20Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea)

Testing Environment: Temperature (23 ± 4) °C, Humidity (46 ± 7) % R.H.

Test Result : Refer to the attached Document.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

This laboratory is not accredited for the test results marked. " \* "

Tested by Affirmation Name: NamGyu Lee Technical Manager

Name: KiDeok Kim

The above test report is the accredited test result by Korea Laboratory Accreditation Scheme, which signed the ILAC-MRA.

October 22, 2024

Dt&C Co., Ltd.

Accredited by KOLAS, Republic of KOREA

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

TRF-RC-006(02)240307











Pages: 1 / 15